




ROTARY SHAFT OIL SEAL: GP

CODE 001360

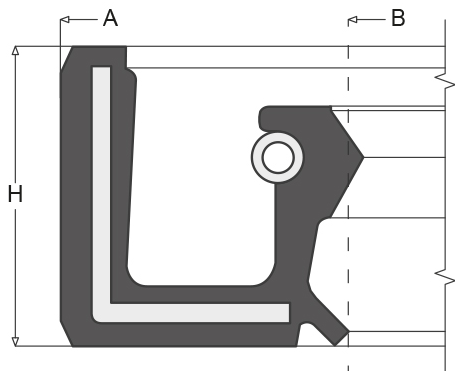

| DIMENSIONS | | |
|--|----------------------------------|-----------------|
| B | 10,00 | |
| A | 26,00 | |
| H | 7,00 | |
| TOLERANCE DIN3760 - 1996 (all dimensions in mm) | | |
| EXTERNAL DIAMETER | | |
| External diameter | Tolerance | |
| D | External metal | External rubber |
| until 50 | +0.08 +0.20 | +0.15 +0.30 |
| from 50 to 80 | +0.09 +0.23 | +0.20 +0.35 |
| from 80 to 120 | +0.10 +0.25 | +0.20 +0.35 |
| from 120 to 180 | +0.12 +0.28 | +0.25 +0.45 |
| from 180 to 300 | +0.15 +0.35 | +0.25 +0.45 |
| from 300 to 440 | +0.20 +0.45 | +0.30 +0.55 |
| over 440 | Contact our Technical Department | |
| THICKNESS OR HEIGHT | | |
| until 10 | +/- 0.20 | |
| over 10 | +/- 0.30 | |
| DESCRIPTION | | |
| Like design G, with additional dust lip. | | |
| PRESSURE: Up to 0.5 BAR (0.05 MPa) | | |
| USE: Radial Sealing | | |
| OUTSIDE Ø: Rubber covered | | |
| CONSTRUCTION: Rubber covered metal casing + Sealing lip + garter spring + Dust lip | | |
| APPLICATIONS | | |
| Wind Mill Industry; General Industry; | | |

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.
The information given in this drawing are to be considered confidential.
The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.