




TEXTILE RUBBER OIL SEALS: TGU-GM

CODE TGU5416GM

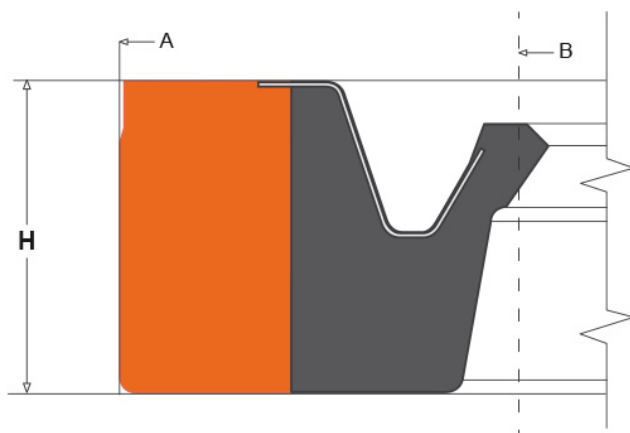

DIMENSIONS

B	130,00
A	160,00
H	12,00

DESCRIPTION

Profile with a special sealing lip to withstand higher pressures.
The TGU-GM type is a ring with a reinforced textile-rubber back, produced with a finger spring in stainless steel:

- The finger spring is vulcanized into the sealing lip.
- The assembly requires a clamping plate.
- By special request it can be produced in its "split" (open) shape. In this case, there should be no pressure in the application.

The minimum inside diameter that can be produced is 150 mm. For smaller dimensions, please contact us to verify production capacity.

PRESSURE: 0 BAR (0 MPa) "split" - 0.5 BAR (0.05 MPa) "endless"

SPEED: Up to 25 m/sec.

USE: Radial Sealing

OUTSIDE Ø: Textile-Rubber

CONSTRUCTION: Textile-Rubber back + Rubber + Sealing lip reinforced + Finger spring

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.

The information given in this drawing are to be considered confidential.

The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

fpparis.com

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

29-06-2025