




BAGUE D'ÉTANCHÉITÉ TYPE L2M^{®}: L2MP-PL

CODE 9991

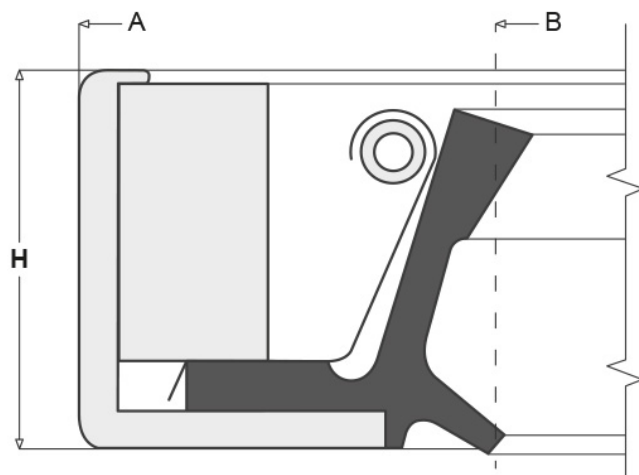

DIMENSIONS

B	410,00
A	470,00
H	28,00

TOLERANCES DIN3760 - 1996 (toutes les dimensions en mm)

Ø SIÈGE NOMINAL (mm)	MIN	MAX
Ø < 203,20	0,1	0,2
203,21 - 228,60	0,13	0,25
228,61 - 508,00	0,15	0,25
508,01 - 1016,00	0,15	0,3
1016,01 - 1524,00	0,15	0,35
Ø > 1524,01	0,15	0,4

DESCRIPTION

Comme le type L2M-PL, avec la lèvre anti-poussière.

PRESSION: jusqu'à 0.5 BAR (0.05 MPa)

EMPLOI: Étanchéité radiale / Interférence réduite

Ø EXTERIEUR: Métal + Bague de renfort en métal

CONSTRUCTION: Boîte en métal + Lèvre d'étanchéité + Bague de renfort + Ressort spiralé + Ressort à doigts + Lèvre anti-poussière

APPLICATIONS

Industrie Du Papier; Industrie Générale;

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.

The information given in this drawing are to be considered confidential.

The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

fpparis.com

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

02-05-2025