




JOINT RACLEURS: RG

CODE 001569

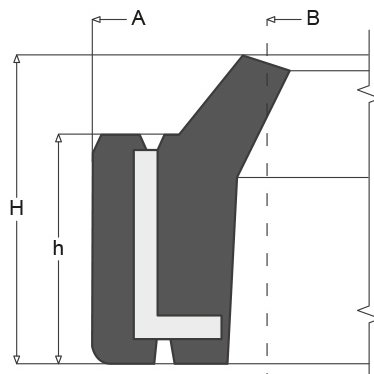

DIMENSIONS		
B	25,00	
A	35,00	
h	5,00	
H	7,00	
TOLERANCES DIN3760 - 1996 (toutes les dimensions en mm)		
DIAMETRE EXTERIEUR		
Diamètre extérieur	Tolérances	
D	Métal externe	Caoutchouc externe
jusqu'à 50	+0.08 +0.20	+0.15 +0.30
de 50 à 80	+0.09 +0.23	+0.20 +0.35
de 80 à 120	+0.10 +0.25	+0.20 +0.35
de 120 à 180	+0.12 +0.28	+0.25 +0.45
de 180 à 300	+0.15 +0.35	+0.25 +0.45
de 300 à 440	+0.20 +0.45	+0.30 +0.55
plus de 440	Contactez notre service technique	
ÉPAISSEUR OU HAUTEUR		
Jusqu'à 10	+/- 0.20	
Plus de 10	+/- 0.30	
DESCRIPTION		
Joint racleur standard avec une cage métallique de renfort.		
TEMPERATURE		
Range -25 / +100 °C mélange NBR		
Range -20 / +100 °C mélange FKM		
VITESSE LINEAIRE: 2 m/s		
EMPLOI: Joint racleur pour les tiges à mouvements rectilignes alternatifs		
Ø EXTERIEUR: Recouvert de Caoutchouc		
CONSTRUCTION: Boîte en métal recouvert de caoutchouc + Lèvre racleur		

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.

The information given in this drawing are to be considered confidential.

The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

fpparis.com

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

29-06-2025