




BAGUES D'ÉTANCHÉITÉ EN CAOUTCHOUC-TEXTILE à HAUTES PRESSIONS: TGA-BP

CODE TGA7515BP

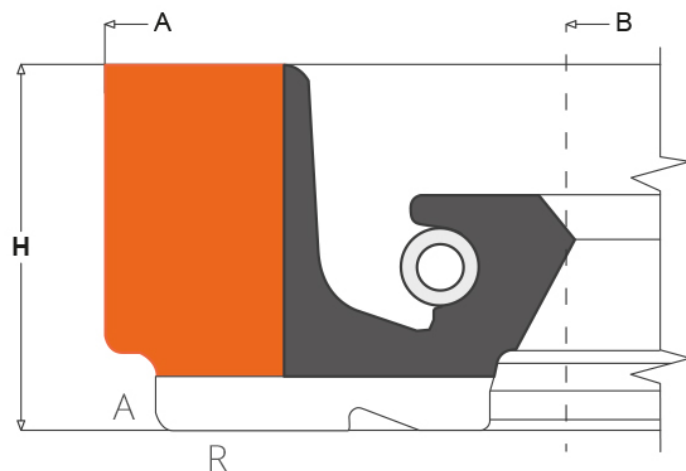

DIMENSIONS	
B	762,00
A	819,15
h	22,22
DESCRIPTION	
Équipé de rainures de lubrification axiales (A) et radiales (R); employé de préférence dans des applications "back to back". Profil spécial de la lèvre d'étanchéité pour supporter des pressions jusqu'à 4 BAR. Déconseillé dans la version ouverte ("split").	
PRESSION: jusqu'à 4 BAR (0.4 MPa) EMPLOI: Étanchéité radiale Ø EXTERIEUR: Caoutchouc-Textile CONSTRUCTION: Dos renforcé de caoutchouc-textile + Caoutchouc + Lèvre d'étanchéité spéciale + Ressort spiralé + Rainures de lubrification A et R	

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.
The information given in this drawing are to be considered confidential.
The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

fpparis.com

02-07-2025