




BAGUE D'ÉTANCHÉITÉ EN CAOUTCHOUC-TEXTILE: TGU

CODE TGU5001

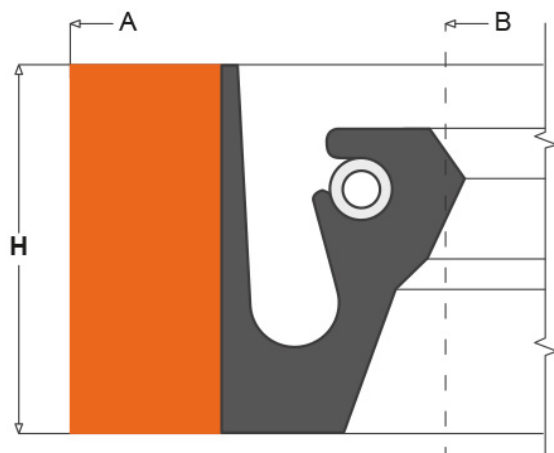

DIMENSIONS

B	25,40
A	47,60
h	9,52

DESCRIPTION

Bagues d'étanchéité renforcées avec dos en caoutchouc-textile flexible et lèvre d'étanchéité équipée d'un ressort torique.

PRESSION: 0 BAR (0 MPa) "ouverte" - max 0.5 BAR (0.05 MPa) "fermée"

VITESSE DE FONCTIONNEMENT: jusqu'à 25 m/s

EMPLOI: Étanchéité radiale

Ø EXTERIEUR: Caoutchouc-Textile

CONSTRUCTION: Dos renforcé de caoutchouc-textile + Caoutchouc + Lèvre d'étanchéité + Ressort spiralé

APPLICATIONS

Industrie Sidérurgique; Industrie éolienne; Secteur Naval; Industrie De L'énergie; Industrie Générale;

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.

The information given in this drawing are to be considered confidential.

The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

fpparis.com

07-06-2025