




OIL SEALS TYPE L2M^{®}: L2MP-PLS

CODE 3007

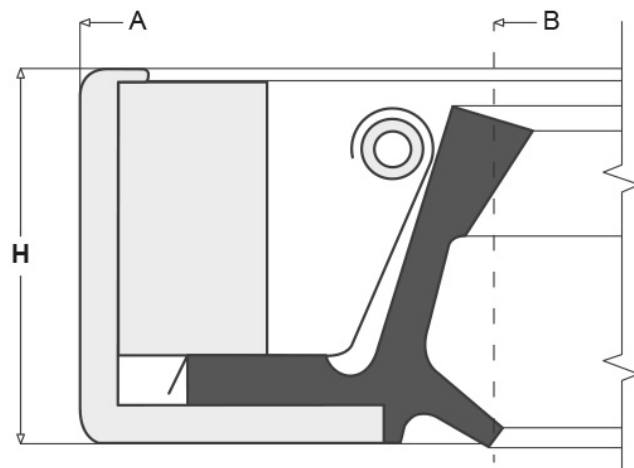

DIMENSIONS

B	330,00
A	370,00
H	18,00

TOLERANCE DIN3760 - 1996 (all dimensions in mm)

Ø NOMINAL SEAT (mm)	MIN	MAX
Ø < 203,20	0,1	0,2
203,21 - 228,60	0,13	0,25
228,61 - 508,00	0,15	0,25
508,01 - 1016,00	0,15	0,3
1016,01 - 1524,00	0,15	0,35
Ø > 1524,01	0,15	0,4

DESCRIPTION

Like design L2M-PLS, with additional dust lip.

PRESSURE: Up to 0.5 BAR (0.05 MPa)

USE: Radial Sealing / Low interference for high speed without misalignment

OUTSIDE Ø: Metal + Stiffening metal ring

CONSTRUCTION: Metal casing + Sealing lip + Stiffening ring + Garter spring + Finger spring + Dust lip

APPLICATIONS

Paper Mill Industry; General Industry;

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.

The information given in this drawing are to be considered confidential.

The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

fpparis.com

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

30-04-2025