




OIL SEALS TYPE L: L1

CODE SC00310

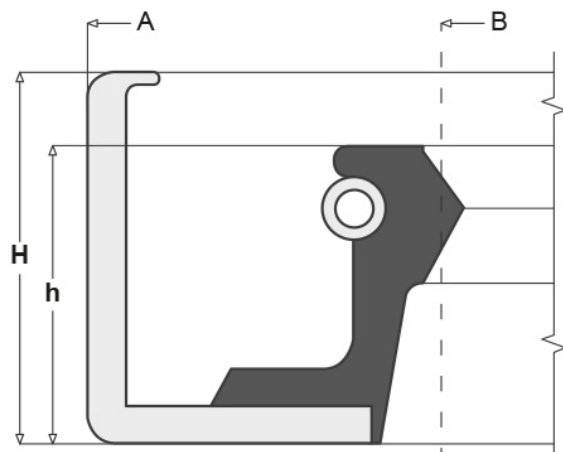

DIMENSIONS

B	68,20
h	9,00

TOLERANCE DIN3760 - 1996 (all dimensions in mm)

EXTERNAL DIAMETER

Ø NOMINAL SEAT (mm)	MIN	MAX
Ø < 50,00	0,1	0,2
50,00 - 80,00	0,13	0,23
80,01 - 120,00	0,15	0,25
120,01 - 180,00	0,18	0,28
180,01 - 300,00	0,2	0,3
300,01 - 500,00	0,23	0,35
500,01 - 630,00	0,25	0,35
630,01 - 1000,00	0,3	0,4
1000,01 - 1250,00	0,3	0,45

DESCRIPTION

Oil seal with ground metal outer casing and sealing lip with a garter spring vulcanized onto the metal body.

PRESSURE: Up to 0.5 BAR (0.05 MPa)

USE: Radial Sealing

OUTSIDE Ø: Metal

CONSTRUCTION: Metal casing + Sealing lip + Garter spring

APPLICATIONS

Metals Industry; General Industry; Wind Mill Industry; Power Generation Industry;

The present drawing is property of F.Ili Paris S.r.l. a socio unico, who owns all rights on it. Full or partial reproductions are forbidden unless authorized by written permission.

The information given in this drawing are to be considered confidential.

The drawing in this page is for information only. Please contact our offices for an official drawing with all notes, dimensions and tolerances not present in this document.

F.Ili Paris S.r.l. a socio unico

fpparis.com

via Marconi 142/144, 24060 Castelli Calepio (BG) ITALY
☎ +39 035 442 5511 | 📠 +39 035 442 5478 | ✉ info@fpparis.com

16-07-2025